


Vinyl Real Glass Block Windows



Voted
**Highest
Quality**

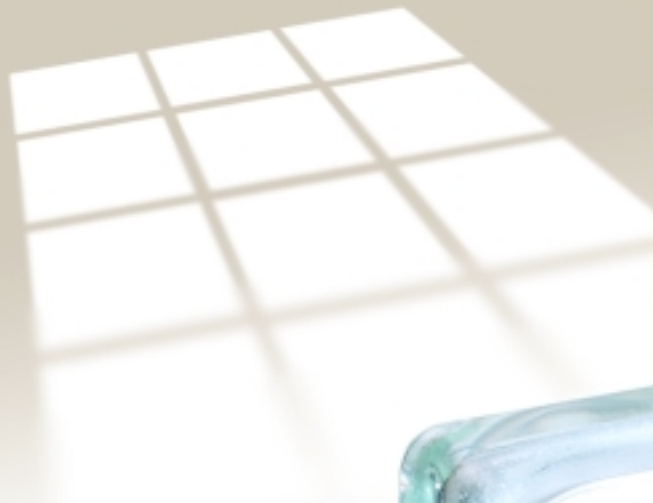

by the National Association of
Home Builders Survey and
Builder Magazine

Our sleek new vinyl window profile gives you more glass and less frame.





Our goals are simple. We simply want to exceed your expectations.

- Privacy • Quality • Durability • Maximum Natural Light
- Ease of Maintenance • Easy Installation
- Beauty of REAL GLASS BLOCK



3 INCH CUSTOM SERIES

Block Unit Sizes
Available

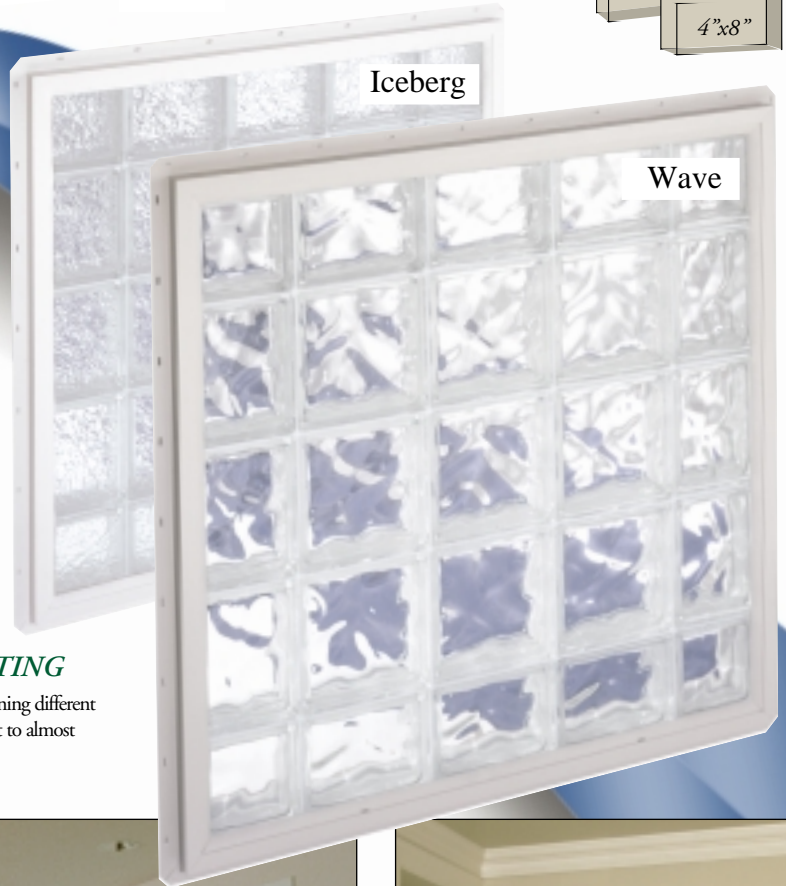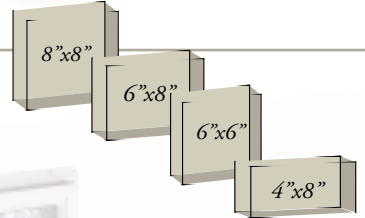

RETROFITTING

Made easy by combining different size blocks that adjust to almost any size opening



FRESH AIR SLIDERS

Check with local manufacturer for availability

*Top off that tub window with a
Fresh Air Slider available in clear or
obscure glass. Some limitations apply
call for availability.*



STAIR STEP SHAPES

Check with local manufacturer for availability


Customize your window design with Stair Step window shapes or mixed patterns and block sizes





P E R F O R M A N C E

F O R A L I F E T I M E

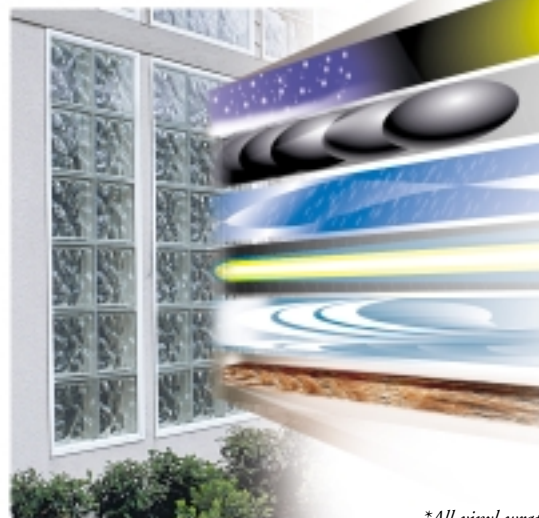

THERMAL PERFORMANCE *Heat & Cold*
Thermal efficiency test varied upon block thickness from .42 up to .52. Test standard: NFRC

IMPACT
400 Foot pound testing resulted in no damage
Test Standard: CPSC 16 CFR 1201 Category

WATER INFILTRATION
Performance after structural test @ 7.5 psf resulted in no infiltration.
Test Standard: ASTM 57-96

FORCED ENTRY
Several forced entry attempts results in no window failure
Test standard: CMBSO / CAWM301-90, forced entry resistance

WIND LOAD *Hurricane*
3" System tested up to 322 mile per hour winds.
Test Standard: AAMA / NWDA 101/I.S. 2-97

*All vinyl wrap systems are TDI approved for inland zone 1 and 2



ENGINEERED

by a team of fenestration experts to withstand the most extreme of conditions. Our patented vinyl stack spacing® system outperforms other real glass block windows that have no integral spacer and rely only on a thin bead of silicone to assemble and seal between glass blocks.

ROUGH OPENING CHART

| | 3" System |
|---|-----------|
| Thermal R-Value | 2.13 |
| Thermal U-Value | .47 |
| Sound Transmission | 31 |
| Safety 400lb Impact | passed |
| Wind Load pounds per square foot | 260psf |
| Weight per square foot | 13. |

| Number of Blocks | Rough Opening |
|------------------|---------------|
| 1 | 10 1/8" |
| 2 | 18" |
| 3 | 25 7/8" |
| 4 | 33 3/4" |
| 5 | 41 5/8" |
| 6 | 49 1/2" |
| 7 | 57 3/8" |
| 8 | 65 1/4" |
| 9 | 73 1/8" |
| 10 | 81" |

LOCAL DEALER

SEATTLE GLASS BLOCK

6029 238th Street Woodinville, WA 98072
425-483-9977 FAX:425-483-9987 TOLL FREE: 800-829-9419
www.seattleglassblock.com

Vinyl Wrap® and Vinyl Stack® Patent and Trademarks owned and developed by Seattle Glass Block
1-800-829-9419 www.seattleglassblock.com

10 YEAR LIMITED WARRANTY

Vinyl Wrap Glass Block windows are guaranteed and warranted by independent fabricators for a period of 10 years - to be free from defect in materials, workmanship and performance. Limitations and conditions available upon request.